



10/523557
PCT/GB 2003/02212
Rec'd PCT/PTO 01 FEB 2005




INVESTOR IN PEOPLE

#2

PRIORITY DOCUMENT

SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH RULE 17.1(a) OR (b)

The Patent Office
Concept House
Cardiff Road
Newport
South Wales
NP10 8QQ




I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

I also certify that by virtue of an assignment registered under the Patents Act 1977, the application is now proceeding in the name as substituted.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

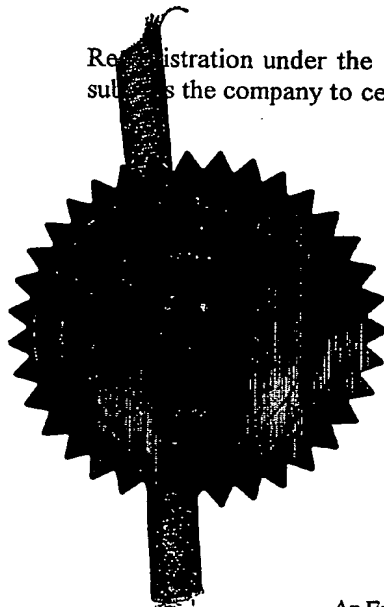

Signed

L. Mahoney

Dated 14 August 2003

An Executive Agency of the Department of Trade and Industry

BEST AVAILABLE COPY



INVESTOR IN PEOPLE

GB0217801.0

By virtue of a direction given under Section 30 of the Patents Act 1977, the application is proceeding in the name of

JOHNSON MATTHEY PLC,
2-4 Cockspur Street,
Trafalgar Square,
LONDON,
SW1Y 5BQ,
United Kingdom

Incorporated in the United Kingdom

[ADP No. 08519803001]

Patents Form

Patents Act 1997
(Rule 16)

THE PATENT OFFICE
A
- 1 AUG 2002
The Patent Office

01AUG02 E737490-1 002577
P01/7700 0.00-0217801.0

Request for grant of a patent

(see the notes on the back of this form. You can also get an explanatory leaflet from the Patent office to help you fill in this form)

The Patent Office

Cardiff Road
Newport
Gwent NP9 1RH

1 Your reference

SYN 51065

2 Patent application number
(The Patent Office will fill in this part)

0217801.0

3 Full name, address and postcode of the or of each applicant (underline all surnames)

IMPERIAL CHEMICAL INDUSTRIES PLC
20 Manchester Square
London W1U 3AN

Patents ADP Number (if you know it)

If the applicant is a corporate body, give the country/state of its incorporation

United Kingdom

4 Title of the invention

HYDROGEN

5 Name of Your Agent (if you have one)

GIBSON, Sara Hillary Margaret

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

Synetix Intellectual Property Department
PO Box 1, Room N101
Belasis Avenue
Billingham
Cleveland
England, TS23 1LB

Patents ADP Number (if you know it)

6 If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or each of these earlier applications and (if you know it) the or each application number

Country	Priority Application number (if you know it)	Date of Filing (day / month / year)
---------	-------------------------------------------------	----------------------------------------

7 If this application is divided or otherwise derived from an earlier UK application, give the number and filing date of the earlier application

Number of earlier application	Date of Filing (day / month / year)
-------------------------------	----------------------------------------

8 Is a statement of inventorship and of right to grant of a patent required in support of this request?

Yes

Answer yes if:

- a) any applicant named in part 3 is not an inventor, or
- b) there is an inventor who is not named as an applicant, or
- c) any named applicant is a corporate body.

See Note (d)

Patents Form 1/77

Patents Form 1/77

- 9 Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form -

Description 4 ✓

Claim(s) 1 ✓

Abstract 1 ✓

Drawings

CF

- 10 If you are also filing any of the following state how many against each item

Priority documents

Translations of priority documents

Statement of Invention and right to grant of a patent (*Patents Form 7/77*)

Request for Preliminary Examination and search (*Patents Form 9/77*)

Request for Substantive Examination (*Patents Form 10/77*)

Any other documents (*Please specify*)

11

I/We request the grant of a patent on the basis of this application

IMPERIAL CHEMICAL INDUSTRIES PLC

Signature

S M Gibson

Date

29.07.2002

- 12 Name and daytime telephone number of person to contact in the United Kingdom

SARA HILLARY MARGARET GIBSON
01642 522650

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been issued, or any such direction has been revoked.

Notes

- a) If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505
- b) Write your answers in capital letters using black ink or you may type them.
- c) If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- d) If you answered 'Yes' Patents Form 7/77 will need to be filed.
- e) Once you have filled in the form you must remember to sign and date it.
- f) For details of the fee and ways to pay please contact the Patent Office.

Patents Form 1/77

Hydrogen

The present invention relates to hydrogen and in particular to the production of hydrogen-containing gas streams. Such gas streams are often made by partial oxidation and/or steam reforming of a suitable carbonaceous feedstock, to produce a gas stream containing hydrogen and carbon oxides. In order to increase the hydrogen content and decrease the carbon monoxide content, the gas stream is then often subjected to the shift reaction wherein carbon monoxide is reacted with steam to produce carbon dioxide and hydrogen. Suitable carbonaceous feedstocks include hydrocarbons such as naphtha and natural gas and hydrocarbon derivatives, e.g. oxygen-containing compounds such as methanol or dimethyl ether.

The shift reaction may be effected using a copper-containing catalyst, often a composition containing copper, zinc oxide and carbon or one or more oxides selected from alumina, silica, rare earth oxides, chromia, zirconia, titania, iron oxide and magnesia.

One application of the above process is in the production of hydrogen streams for use as fuel for fuel cells, for example for mobile applications such as electrically powered vehicles. In such applications there is liable to be frequent shut-down and start-up of the hydrogen production process. It has been found that during such shut-downs, there is a risk that a small amount of air enters into the system and this is liable to oxidise and de-activate the copper-containing shift catalyst.

Although the oxidised copper species will generally be re-reduced to copper metal upon restart of the hydrogen production process by the action of the hydrogen present in the feed to the shift reactor, there is a risk that the shift activity will decrease significantly with time.

In the present invention this problem is overcome by employing a bed of an oxygen scavenger immediately upstream of the shift catalyst. By "immediately upstream" we mean that there is no process step, e.g. heating or cooling, to which the process gas is subjected after passage through the bed of oxygen scavenger and before entering the shift catalyst.

Accordingly the present invention provides a process for the production of a hydrogen-containing gas stream including the shift reaction wherein a gas stream containing carbon monoxide and steam is passed through a bed of a shift catalyst containing, in the reduced state, at least 15% by weight of copper, characterised in that, immediately upstream of said shift catalyst, the gas stream is passed through a bed of an oxygen scavenger comprising an oxidisable composition containing copper and/or iron or iron oxide that is dissimilar to said shift catalyst.

The oxygen scavenger may itself be a shift catalyst e.g. a reduced iron oxide/chromia composition, optionally also containing copper, or be a copper-containing composition exhibiting some shift activity. In this case there will be in effect two or more beds of shift catalyst of differing compositions with the inlet bed acting primarily as the oxygen scavenger.

It has been proposed in WO 00/17096 to have a bed of a copper-containing shift catalyst upstream of an iron oxide-containing shift catalyst. In that reference the purpose of the copper-containing shift catalyst bed was to effect some shift reaction before the gas stream encountered the iron oxide-containing shift catalyst in order to avoid reaction conditions conducive to over-reduction of the iron oxide-containing shift catalyst. That reference also discloses that, after passage through the iron oxide containing shift catalyst, the process gas may be cooled and then subjected to the low temperature shift reaction using a conventional low temperature shift catalyst. In contrast thereto, in the present invention, the oxygen scavenger bed is immediately upstream of the copper-containing shift catalyst, i.e. there is no cooling of the process gas after it has passed through the oxygen scavenger bed and before it enters the copper-containing shift catalyst.

The oxygen scavenger will normally be in the reduced state during normal operation of the hydrogen-producing process and will oxidise in the event of ingress of air during or after a shut-down procedure. Upon re-start of the hydrogen production, the scavenger will generally be re-reduced and so regenerated in readiness for the next shut-down.

The oxygen scavenger composition may be a bed of a high copper content composition such as a methanol synthesis catalyst, e.g. a composition containing copper and one or more stabilising oxides such as zinc oxide, alumina, magnesia, chromia, zirconia, titania or rare earth oxides and containing at least 50% by weight of copper when in the reduced state. Such materials generally have a relatively high copper surface area per gram of catalyst and so have a high capacity for absorbing oxygen. The high surface area agglomerates described in US 4871710 and made by agglomerating co-precipitated copper, zinc and aluminium compounds may, after reduction, also be used as the copper-containing oxygen scavenger. Yet another copper-containing oxygen scavenger that may be used is the product of reducing the alumina/copper carbonate agglomerates described in US 5853681. Alternatively copper supported on carbon or silica may be employed.

However high copper-content compositions having a high copper surface area (e.g. above about 40 m² per gram of the reduced scavenger composition) may lack adequate physical strength to withstand repeated oxidation/reduction cycles in some applications.

In such a case it may be desirable to employ a copper-containing composition of greater physical strength. Thus a suitable support having the desired physical strength may be impregnated or coated with a composition containing a suitable copper species: the coated or impregnated support is subsequently subjected to a reduction step to convert the copper species to metallic copper. In a preferred system however, the oxygen scavenger is the product of reducing a precursor comprising copper compounds supported on shaped units of a material such as alumina or a calcium aluminate cement. Such a precursor may be produced by impregnating the support with a solution of a thermally decomposable copper compound, and optionally other components such as zinc, magnesium, aluminium and/or chromium

compounds, followed by calcination of the impregnated support to decompose the copper compound, and possibly other components, to the oxidic state. Alternatively the support material may be coated with a slurry of precipitated, thermally decomposable, copper compounds, and possibly other components as aforesaid, dried, and then calcined to convert the thermally decomposable compounds to the oxidic form. Preferably such oxygen scavengers, after reduction, contain 3 to 15% by weight of copper. The oxygen scavenger may be in the form of a random packed bed of pellets of the support, which may be a macroporous foam as described in US 4810685, or monolithic, e.g. a honeycomb or a macroporous foam as aforesaid, to which the catalytic material has been applied, for example by impregnation or coating. One method of forming suitable impregnated oxygen scavengers involves impregnating a transition alumina support with an ammoniacal copper carbonate complex followed by heating to decompose that complex.

The shift catalyst contains, in the reduced state, at least 15% by weight of copper and typically comprises the product of reducing pellets formed from a calcined composition of co-precipitated copper, zinc and aluminium and/or chromium compounds, e.g. oxides, hydroxides or basic carbonates. Often such catalysts (in the reduced state) contain 20-50% by weight of copper. Other components such as magnesium or manganese compounds may be incorporated.

The oxygen scavenger and/or shift catalyst may be charged to the reactor in which the process is to be effected as precursors in the oxidised state and then reduced in situ. The reduction may be effected using the process gas, e.g. from steam reforming, as the gas used to effect reduction. However there is a risk that this will result overheating of the copper-containing shift catalyst and hence loss of activity thereof. Reduction using a gas stream containing only a small proportion of hydrogen, e.g. less than 10% by volume of hydrogen is therefore preferred. Since this may be inconvenient for some applications, e.g. where the shift reactor is part of a mobile unit, it may be preferable to employ a pre-reduced shift catalyst. US 5928985 describes a process, using carbon dioxide and oxygen, to effect passivation of copper catalysts. After charging the pre-reduced and passivated shift catalyst, the latter can be re-reduced to the active state using the hydrogen-containing process gas without undue heating of the catalyst. Upon shut-down the oxygen scavenger acts to minimise the oxidation of the shift catalyst and so re-reduction of the latter thereafter is unnecessary and/or can be effected with the process gas without undue overheating. Furthermore, providing the proportion of oxygen scavenger employed is relatively small, re-reduction of the latter after a shut down can be effected with the process gas without undue overheating. Also, if the oxygen scavenger contains a relatively small proportion of copper on a support, the support acts as a heat sink to minimise the risk of overheating, thus enabling reduction to be effected with the process gas.

The amount of oxygen scavenger employed in relation to the amount of shift catalyst will depend upon the nature of the oxygen scavenger and the expected amount of oxygen ingress. Preferably the volume of oxygen scavenger is 5 to 20%, preferably 5 to 10%, of the volume of the shift catalyst.

- 5 The shift process is preferably effected at a pressure in the range 1 to 30 bar abs and at an inlet temperature in the range 120°C to 280°C, particularly 150°C to 250°C. Heat evolved in the shift reaction may be recovered and used to provide heat required elsewhere in the hydrogen production process, e.g. for pre-heating the feedstock and/or for providing steam required for reforming.
 - 10 In a typical fuel cell application, the shift stage will form part of a hydrogen production train including partial oxidation and/or steam reforming of a suitable feedstock as indicated above. The shift stage will normally be followed by a stage of selective oxidation of any residual carbon monoxide. If the fuel cell is of a type that is de-activated by carbon dioxide, a step of carbon dioxide removal will be employed after the shift stage. In this case residual
 - 15 carbon oxides can be removed by methanation and selective oxidation of the carbon monoxide is then not necessary.
-

Claims

1. A process for the production of a hydrogen-containing gas stream including the shift reaction wherein a gas stream containing carbon monoxide and steam is passed through a bed of a shift catalyst containing, in the reduced state, at least 15% by weight of copper, characterised in that, immediately upstream of said shift catalyst, the gas stream is passed through a bed of an oxygen scavenger comprising an oxidisable composition containing copper and/or iron or iron oxide that is dissimilar to said shift catalyst.
2. A process according to claim 1 wherein the shift catalyst, in the reduced state, contains 20 to 50% by weight of copper.
3. A process according to claim 1 or claim 2 wherein the oxygen scavenger, in the reduced state, contains at least 50% by weight of copper.
4. A process according to claim 1 or claim 2 wherein the oxygen scavenger comprises the product of reducing copper compounds supported on shaped units formed from alumina or a calcium aluminate cement.
5. A process according to claim 4 wherein the oxygen scavenger, after reduction, contains 3 to 15% by weight of copper.
6. A process according to any one of claims 1 to 5 wherein the volume of oxygen scavenger is 5 to 20% of the volume of the shift catalyst.

Abstract

Production of a hydrogen-containing gas stream by subjecting a gas stream containing carbon monoxide and steam to the shift reaction using a shift catalyst containing, in the reduced state, at least 15% by weight of copper, wherein, immediately upstream of the shift catalyst, the gas stream is passed through a bed of an oxygen scavenger comprising an oxidisable composition containing copper and/or iron or iron oxide that is dissimilar to said shift catalyst.

THE PATENT OFFICE
14 AUG 2003
Received in Patents
International Unit

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☒ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKewed/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☒ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER: _____**

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.